



## Product description:

- Alisia LED downlight is approved for directly in insulation and flammable material.
- Screwless cable relief and wire mount in terminal box, ensures a quick and easy assembly with minimal use of tools.
- The terminal box / driver can easily be separated from the luminaire, which can be an advantage when painting.
- The luminaire is available in a 6W, 12W and 18W version.

IP44



Technical data:	
Cutout size:	Ø110 mm/Ø155 mm/Ø208 mm
Outside dimensions:	Ø120 mm/Ø172 mm/Ø225 mm
Height:	24 mm
Voltage:	100-240VAC 50 Hz
System power:	6W/12W/18W
Luminous flux:	540lm/1120lm/1880lm
Dimmable:	No
Color Rendering Index:	Ra>82
Beam angle:	120°
SDCM:	3
IP Class:	IP44
Insulation class:	IK06
Material:	Class II
Through-wiring:	Plastic/Aluminium
Approvals:	Yes (3G1.5 mm <sup>2</sup> )
Godkendelser:	LVD, EMC, RoHS, CE

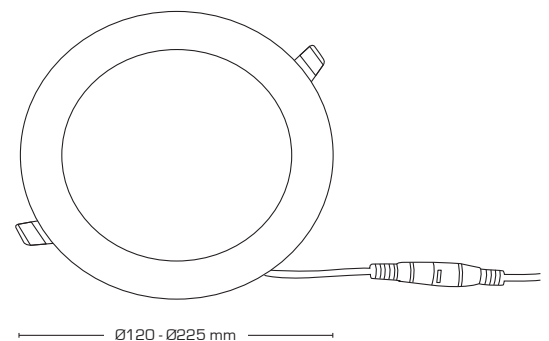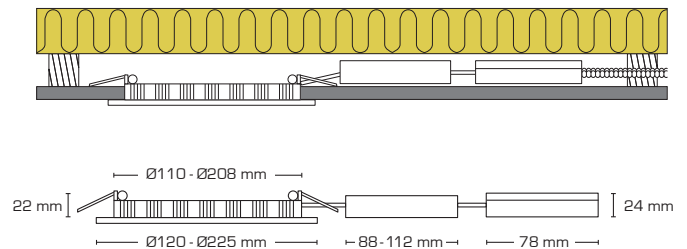

Item no.:	EAN Code:	Kelvin:	Watt:	Lumen:	Outside dimensions:	Color:
10211	5713080102117	3000K	6W	540 lumen	Ø120mm	Matt white
10212	5713080102124	3000K	12W	1120 lumen	Ø172mm	Matt white
10213	5713080102131	3000K	18W	1880 lumen	Ø225mm	Matt white

