



## Product description:

- Alisia LED downlight is approved for directly in insulation and flammable material.
- Screwless cable relief and wire mount in terminal box, ensures a quick and easy assembly with minimal use of tools.
- The terminal box / driver can easily be separated from the luminaire, which can be an advantage when painting.
- The luminaire is available in a 6W, 12W and 18W version.

IP44



| Technical data:        |                              |
|------------------------|------------------------------|
| Cutout size:           | Ø110 mm/Ø155 mm/Ø208 mm      |
| Outside dimensions:    | Ø120 mm/Ø172 mm/Ø225 mm      |
| Height:                | 24 mm                        |
| Voltage:               | 100-240VAC 50 Hz             |
| System power:          | 6W/12W/18W                   |
| Luminous flux:         | 540lm/1120lm/1880lm          |
| Dimmable:              | No                           |
| Color Rendering Index: | Ra>82                        |
| Beam angle:            | 120°                         |
| SDCM:                  | 3                            |
| IP Class:              | IP44                         |
| Insulation class:      | IK06                         |
| Material:              | Class II                     |
| Through-wiring:        | Plastic/Aluminium            |
| Approvals:             | Yes (3G1.5 mm <sup>2</sup> ) |
| Godkendelser:          | LVD, EMC, RoHS, CE           |

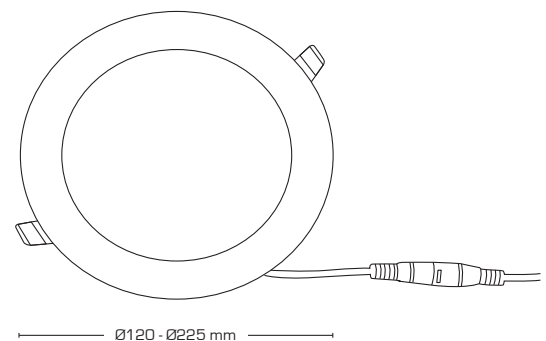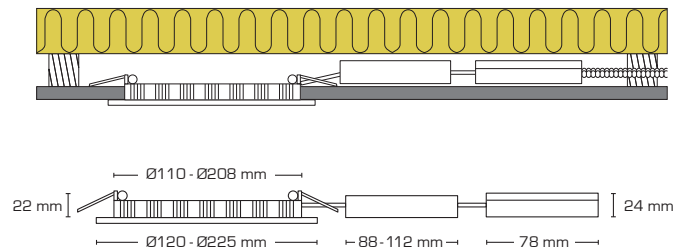

| Item no.: | EAN Code:     | Kelvin: | Watt: | Lumen:     | Outside dimensions: | Color:     |
|-----------|---------------|---------|-------|------------|---------------------|------------|
| 10211     | 5713080102117 | 3000K   | 6W    | 540 lumen  | Ø120mm              | Matt white |
| 10212     | 5713080102124 | 3000K   | 12W   | 1120 lumen | Ø172mm              | Matt white |
| 10213     | 5713080102131 | 3000K   | 18W   | 1880 lumen | Ø225mm              | Matt white |

