


## Product description:

- LED mirror luminaire in a classic and timeless design.
- The replaceable LED makes the installation flexible and future-proof, for example, at the request of a different color temperature.
- The luminaire is ideal for housing, housing associations, hotels, etc. where high demands are placed on reliability and good lighting properties.
- The cable entry is located centered on the back and top of the luminaire.
- Screwless cable relief and wire mounting ensures quick and easy assembly with minimal tool utilization.




Possible option for PIR sensor with slave function!



## Technical data:

Size:	600 x 112 x 72 mm (with power outlet & PIR) 600 x 112 x 60 mm
Voltage:	220-240VAC 50 Hz
System power:	20W
Luminous flux:	1420lm/ 1530lm
Dimmable:	No
Color Rendering Index:	Ra>96
Beam angle:	170°
LED:	Integrated LED - can be replaced
SDCM:	<3
IP Class:	IP44
IK-Class:	IK08
Insulation class:	Class I
Material:	Powder coated steel, polycarbonate
Approvals:	LVD, EMC, RoHS, CE

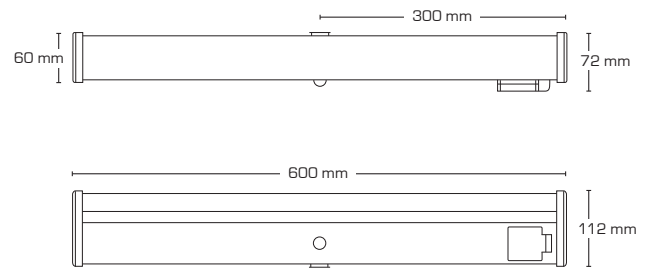

## PIR sensor:

Time range:	5 sec. +/- 1 sec. til 8 min +/- 1 min
Detection range:	0 - 2,5 m (installation height 2 m)
Detection area:	180°
Through-wiring:	Max. 100W

Item no.:	EAN Code:	Description:	Outside dimensions:	Color:
12201	5713080122016	3000K with power outlet 16A	600 x 112 x 72 mm	White
12202	5713080122023	3000K without power outlet	600 x 112 x 60 mm	White
12203	5713080122030	3000K PIR sensor & power outlet 16A	600 x 112 x 72 mm	White
12204	5713080122047	3000K PIR sensor, without power outlet	600 x 112 x 60 mm	White
12205	5713080122054	4000K with power outlet 16A	600 x 112 x 72 mm	White
12206	5713080122061	4000K without power outlet	600 x 112 x 60 mm	White
12207	5713080122078	4000K PIR sensor & power outlet 16A	600 x 112 x 72 mm	White
12208	5713080122085	4000K PIR sensor, without power outlet	600 x 112 x 60 mm	White
12431	5713080124317	3000K LED module		
12432	5713080124324	4000K LED module		
12433	5713080124331	Cover		

