
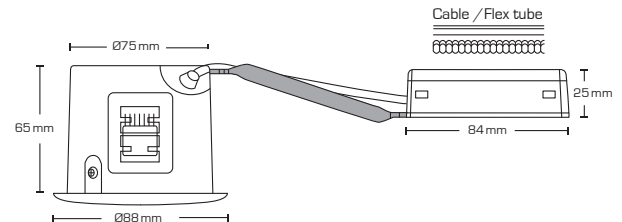
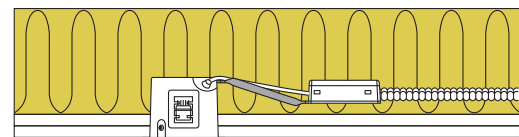


Alda 2700K & 3000K

Product description:

- Alda is a classic adjustable, flicker free LED downlight, that is approved for direct installation in insulation and flammable material.
- Screwless cable relief and wire mount in terminal box, ensures a quick and easy assembly with minimal use of tools.
- Possibility of 2 spring positions - depending on the ceiling construction.
- Delivered with dimmable 5W GU10 LED light source.
- The mounting height of only 65 mm ensures many applications.
- It is possible to mount with cable or 16 mm flexible tube.

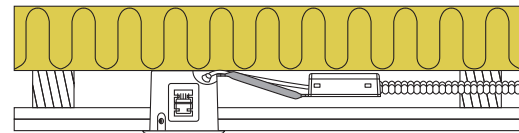

Technical data:

Cutout size:	Ø75 mm
Outside dimensions:	Ø88 mm
Height:	65 mm
Voltage:	220-240VAC 50 Hz
System power:	5W
Luminous flux:	370lm/385lm
Dimmable:	Yes
Color Rendering Index:	Ra>90
Beam angle:	38°
Adjustable:	25°
Fitting:	GU10
Protection:	Class II, IP21
Material:	Steel / Aluminium
Through-wiring:	Yes (3G1,5 mm ²)
Approvals:	LVD, EMC, RoHS, CE

Item no.:	EAN no.:	Outside dimensions:	Front design:	Kelvin:	Color:
10063	5713080100632	Ø88 mm	Round	2700K	White
10064	5713080100649	Ø88 mm	Round	2700K	Brushed aluminum
10065	5713080100656	Ø88 mm	Round	3000K	White
10066	5713080100663	Ø88 mm	Round	3000K	Brushed aluminum
12423	5713080124232	Ø125 mm	Sealing ring		
12424	5713080124249		5-Pin Push Connector		

