

# Claudia looping 2700K, 3000K & 4000K


Ra95 IP44

## Product description:

- Claudia is an adjustable LED mini-downlight, that is approved for installation directly in insulation and flammable material.
- Screwless cable relief and wire mount in terminal box, ensures a quick and easy assembly with minimal use of tools.
- Claudia is specially designed for constructions with minimal installation height. This makes Claudia ideal for mounting in a false ceiling with minimal space. Claudia is also ideal for upgrading existing installations with Ø56 mm cutout.



Technical data:	
Cutout size:	Ø56 mm
Outside dimensions:	Ø65 mm
Height:	15 mm
Current:	350 mA
Watt:	3,2W
Luminous flux:	250lm/270lm/290lm
Dimmable:	Yes
Color Rendering Index:	Ra95
Beam angle:	45°
Adjustable:	30°
SDCM:	<2
Protection:	Class III, IP44
Material:	Plast/Aluminum
Through-wiring:	Yes [2x1.5 mm <sup>2</sup> ]
Approvals:	LVD, EMC, RoHS, CE

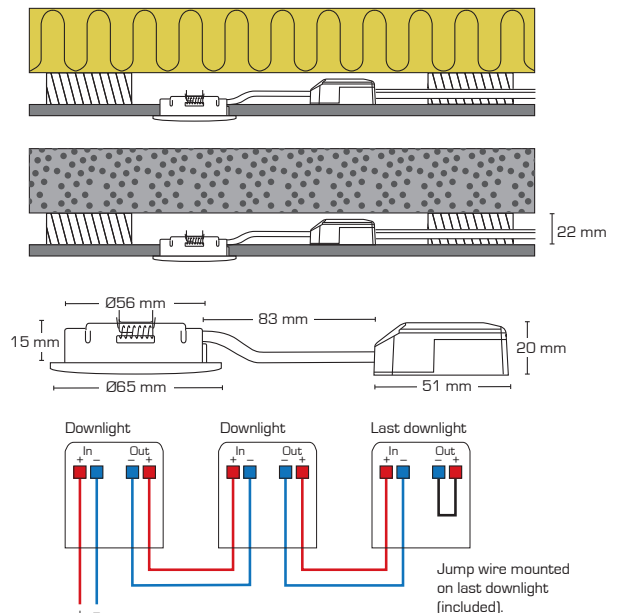

### Power supply:

Constant current **350mA**.

Note that the power supply **must be** constant current [350mA] and **not** 12V AC/DC.

Use Scan Products driver, art.no.: 12401/12402/12403/12404.

Item no.:	EAN no:	Outside dimensions:	Lumen:	Kelvin:	Color:
12261	5713080122610	Ø65 mm	250 lumen	2700K	Matt white
12262	5713080122627	Ø65 mm	250 lumen	2700K	Brushed aluminum
12263	5713080122634	Ø65 mm	270 lumen	3000K	Matt white
12264	5713080122641	Ø65 mm	270 lumen	3000K	Brushed aluminum
12265	5713080122658	Ø65 mm	290 lumen	4000K	Matt white

