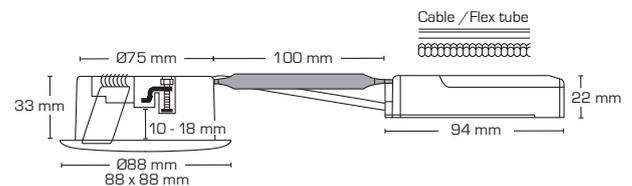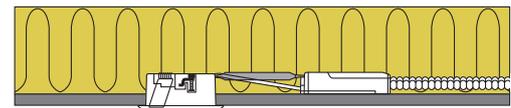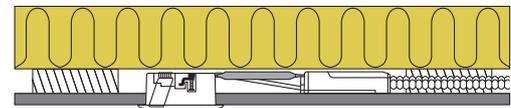# Luna LP - 3000K

Product description:

- Luna is an innovative, flicker free LED downlight, approved for installation directly in insulation and flammable material.
- Due to mounting with the help of screws and/or springs, a perfect result is guaranteed – every time!
- Suitable for acoustic ceiling.
- The installation height of only 33 mm makes it possible to mount Luna in most places.
- The replaceable LED light source makes the installation flexible and future-proof – for example, if you want a different color temperature.
- It is possible to mount with cable or 16 mm flexible tube.

Ra95 | **IP44** | **Change LED able** | **5 Year warranty**

Flicker free!

Technical data:

Cutout size:	Ø75 mm
Outside dimensions:	Ø88 mm or 88 x 88 mm
Height:	33 mm
Voltage:	220-240VAC 50 Hz
System power:	6,2W
Luminous flux:	370lm
Dimmable:	Yes
Color Rendering Index:	Ra95
Beam angle:	42°
Adjustable:	36°
SDCM:	<2
Protection:	Class II, SELV, IP44
Material:	Plast/Aluminium
Through-wiring:	Yes (3G1.5 mm²)
Approvals:	LVD, EMC, RoHS, CE

Cable /Flex tube

Ø75 mm — 100 mm
33 mm
10 - 18 mm
Ø88 mm
88 x 88 mm
22 mm
94 mm

Item no.:	EAN no.:	Outside dimensions:	Front design:	Color:
10111	5713080101110	Ø88 mm	Round	Matt white
10112	5713080101127	Ø88 mm	Round	Brushed aluminum
10113	5713080101134	88 x 88 mm	Square	Matt white
10114	5713080101141	88 x 88 mm	Square	Brushed aluminum
10115	5713080101158	Ø88 mm	Round	Matt black
10116	5713080101165	Ø88 mm	Round	Copper

220-240 VAC	IP44	Indoor	0.1m	Ø75	H 33 mm	6,2W	370 Lumen	Ra 95	3000 Kelvin

42°	36°	Dimmable	50.000h L90 B10						

This luminaire is compatible with bulbs of the energy classes: A++ A+ A

The luminaire is sold with a bulb of the energy class: A

LED Downlight

L E D

874/2012

We refer to our website www.scan-products.com regarding: products, documentation, approvals, dimmer overview, etc.
All rights belong to Scan Products D T ApS.

2021.01.29
Subject to typographical errors