
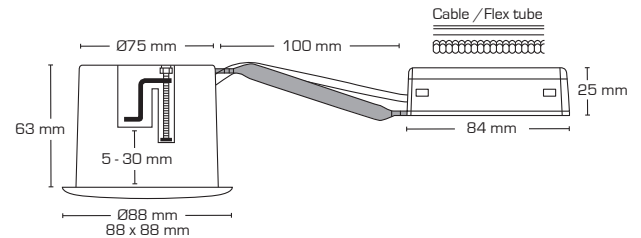
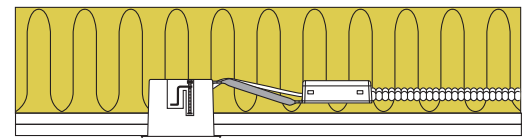


Luna Quick install - 3000K

Product description:

- Luna is an adjustable, flicker free LED downlight with rear mounted light source, approved for installation directly in insulation and flammable material.
- Screwless cable relief and wire mount in terminal box, ensures a quick and easy assembly with minimal tool utilization.
- Luna is fastened using screws and is also suitable for acoustic ceilings.
- The height of only 63 mm makes it possible to mount Luna in most installations.
- Delivered with dimmable 5W GU10 LED light source.
- It is possible to mount with cable or 16 mm flexible tube.

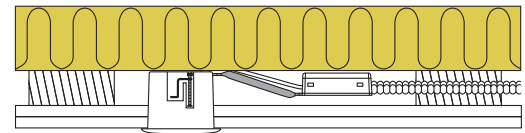

Technical data:

Cutout size:	Ø75 mm
Outside dimensions:	Ø88 mm or 88 x 88 mm
Height:	63 mm
Voltage:	220-240VAC 50 Hz
System power:	5W
Luminous flux:	385lm
Dimmable:	Yes
Color Rendering Index:	Ra>90
Beam angle:	38°
Adjustable:	28°
Fitting:	GU10
Protection:	Class II, IP44
Material:	Plastic/ Aluminium
Through-wiring:	Yes (3G1.5 mm ²)
Approvals:	LVD, EMC, RoHS, CE

Item no.:	EAN no.:	Outside dimensions:	Description:	Color:
10021	5713080100212	Ø88 mm	Round	Matt white
10022	5713080100229	Ø88 mm	Round	Brushed aluminum
10023	5713080100236	88 x 88 mm	Square	Matt white
10024	5713080100243	88 x 88 mm	Square	Brushed aluminum
10025	5713080100250	Ø88 mm	Round	Matt black
10026	5713080100267	Ø88 mm	Round	Copper
12423	5713080124232	Ø125 mm	Sealing ring	
12424	5713080124249		5-Pin Push Connector	

