

Luna Quick install outdoor - 2700K, 3000K & 4000K


Product description:

- Luna is an adjustable, flicker free LED downlight with rear mounted light source, approved for installation directly in insulation and flammable material.
- The front is made of stainless steel AISI 316.
- Screwless cable relief and wire mount in terminal box, ensures a quick and easy assembly with minimal tool utilization.
- Fastening with screws.
- The height of only 63 mm makes it possible to mount Luna in most installations.
- Delivered with dimmable 5W GU10 LED light source.
- It is possible to mount with cable or 16 mm flexible tube.



Technical data:

Cutout size:	Ø75 mm
Outside dimensions:	Ø88 mm
Height:	63 mm
Voltage:	220-240VAC 50 Hz
System power:	5W
Luminous flux:	370lm/385lm/410lm
Dimmable:	Yes
Color Rendering Index:	Ra>90
Beam angle:	38°
Adjustable:	28°
Fitting:	GU10
Protection:	Class II, IP44
Material:	Plastic/Stainless steel AISI 316
Through-wiring:	Yes (3G1.5 mm ²)
Approvals:	LVD, EMC, RoHS, CE

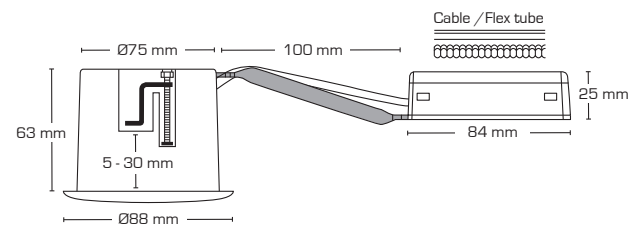

Item no.:	EAN no.:	Outside dimensions:	Description:	Kelvin:	Color:
10081	5713080100816	Ø88 mm	Round	2700K	White
10082	5713080100823	Ø88 mm	Round	2700K	Brushed steel
10083	5713080100830	Ø88 mm	Round	2700K	Black
10091	5713080100915	Ø88 mm	Round	3000K	White
10092	5713080100922	Ø88 mm	Round	3000K	Brushed steel
10093	5713080100939	Ø88 mm	Round	3000K	Black
10097	5713080100977	Ø88 mm	Round	4000K	White
10098	5713080100984	Ø88 mm	Round	4000K	Brushed steel
10099	5713080100991	Ø88 mm	Round	4000K	Black

