

Silvia 2700K & 3000K





Product description:

- Silvia is a LED minidownlight approved for direct installation in insulation and flammable material.
- Easy mounting with existing installation by means of push-in connector (max. 2x0,75 mm²).
- Ideal for mounting under a cabinet in existing cutouts or using a mounting ring (accessory).
- Adjustable spring for cutout Ø56-62 mm.
- The mounting height of only 12 mm makes it possible to mount Silvia minidownlight in most places.
- Delivered with 3 meter wire.

Ra>90 IP44



Incl. 3 meter wire

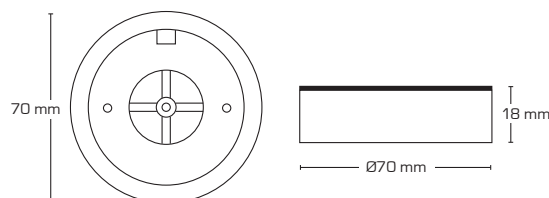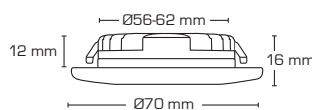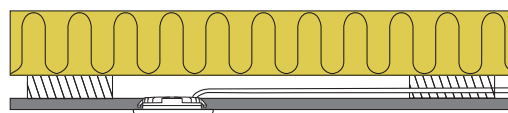

Technical data:	
Cutout size:	Ø56-62 mm
Outside dimensions:	Ø70 mm
Height:	12 mm
Current:	350 mA
Watt:	3,2W
Luminous flux:	300lm/315lm
Dimmable:	Yes
Color Rendering Index:	Ra>90
Beam angle:	90°
SDCM:	<3
Protection:	Class III, IP44
Material:	Aluminium
Approvals:	LVD, EMC, RoHS, CE

Item no.:	EAN no.:	Outside dimensions:	Front design:	Kelvin:	Color:
12011	5713080120111	Ø70 mm	Round	2700K	Matt white
12012	5713080120128	Ø70 mm	Round	2700K	Matt black
12014	5713080120142	Ø70 mm	Round	3000K	Matt white
12015	5713080120159	Ø70 mm	Round	3000K	Matt black
12017	5713080120173	Ø70 x 18 mm	Mounting ring		Matt white
12018	5713080120180	Ø70 x 18 mm	Mounting ring		Matt black
12430	5713080124300	3 meter	Wire		

Serial: 350mA	IP44	Indoor	0.1m	Ø56-62	H 12 mm	3,2W	Ra >90	90°	Dimmable
50.000h L90 B10	III	M/M		CE					

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

A++ A+ A C D E

Scan Products LED Minidownlight 874/2012