

# Push Dimmer


## Product description:

- Optimal dimming for Scan Products lighting products – Always check the latest and updated dimmer overview on our home page: [www.scan-products.com](http://www.scan-products.com)
- Works with most of the common dimmable LED products on the market.
- Control voltage from 8-230V enable operation using push button switch.
- Can be mounted in most of the common European installation boxes.
- The dimmer even has a memory function.



## Technical data:

Size:	45x45x20 mm
Voltage:	100-240VAC 50 Hz
Max. load at 230V:	200W LED 200W Capacitive 400W Resistive
Max. output current:	1,8A
Styrespænding:	8-230V AC/DC
Dimming method:	Trailing edge
Protection:	IP20
Material:	Plastic
Approvals:	CE

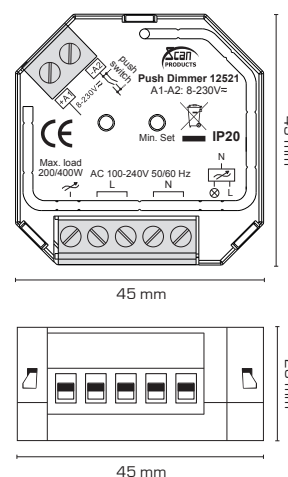

Item no.:	EAN no.:
12521	5713080125215
12437	5713080124379 DIN rail mounting bracket

## Wiring diagram

