


Zigbee Switch

Product description:

- Make your installation intelligent with our Zigbee Relay.
- You can use this for different cases:
 - Lighting luminaires, sign lighting and the like.
 - External socket (Please notice the maximum output)
 - Fans
 - Pumps, for example circulation pumps
 - Effect lighting, such as Christmas lighting.
- Integrated Zigbee 3.0 communication module, compatible with leading Zigbee Gateways*, such as Philips Hue and Samsung SmartThings. Google Home / Alexa with compatible Gateways.
- Control voltage from 8-230V even enable operation using push button switch.
- Can be mounted in most of the common European installation boxes.




Technical data:	
Size:	45x45x20 mm
Voltage:	100-240VAC 50 Hz
Max. load at 230V:	200W LED
	200W Capacitive
	200W Inductive
	400W Resistive
Max. output current:	1,8A
Control voltage:	8-230V AC/DC
Protection:	IP20
Material:	Plastic
Approvals:	CE

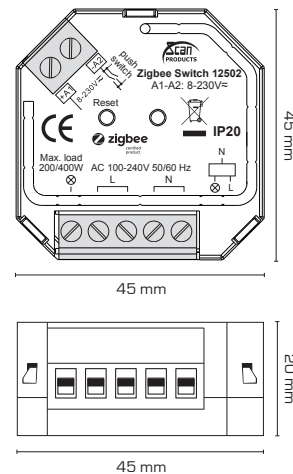

Item no.:	EAN no.:
12502	5713080125024
12437	5713080124379
	DIN rail mounting bracket

Wiring diagram

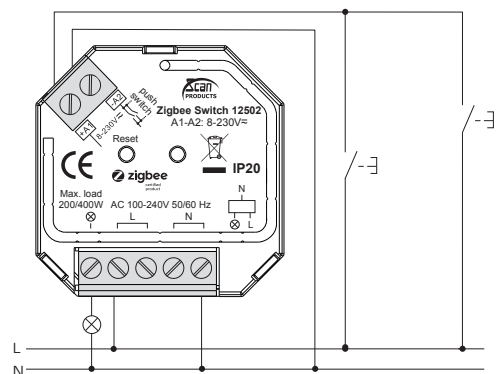

*We recommend performing a test setup with the desired Gateway, due to different firmware and hardware versions. This is to ensure 100% compatibility.

